


REPRODUCED OR UTILIZED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, 2) THE CONCRETE SHALL BE MINIMUM OF 4000 PSI, POST SHALL BE FILLED WITH 30" OF CONCRETE (STOP 3" FROM BOTTOM CABLE HOLE).

3) ALL REBAR SHALL HAVE A MINIMUM OF 2" CONCRETE COVER, SEE REBAR DRAWINGS.

- 4) ATLAS SECURITY PRODUCTS INC'S CABLE CLAMP, ASPI CLAMP-0.75 SHALL BE USE FOR TERMINATION OF CABLE IN THE END AND TERMINAL POSTS. CABLE CLAMP BOLTS SHALL BE TIGHTENED TO 230 FOOT-POUNDS TORQUE.
- 5) U-BOLTS SHALL BE TIGHTENED UNTIL CABLES CAN NOT BE HAND PULLED THRU THE CABLE SUPPORT POST U- BOLTS, MAXIMUM TORQUE SHALL NOT EXCEED 10 FOOT-POUNDS.

ATLAS SECURITY PRODUCTS INC.					
ATLASBARRIERS.COM		P.O. BOX 59423, ROCKVILLE, MD 20859		PH#: 866- 47-ATLAS	
NAME OF CLIENT				A	
PROJECT / MACHINE					+
	NAME	DATE	REF DRG NO:		
DRN		05-01-2021	FOR M30/P2 POST AND		SIZE
CHKD					A- 3
APPD					
WONO	UNIT	SCALE	DRG NO : ASPI-CFC-M30P2		REV. NO
	INCHES	NTS			

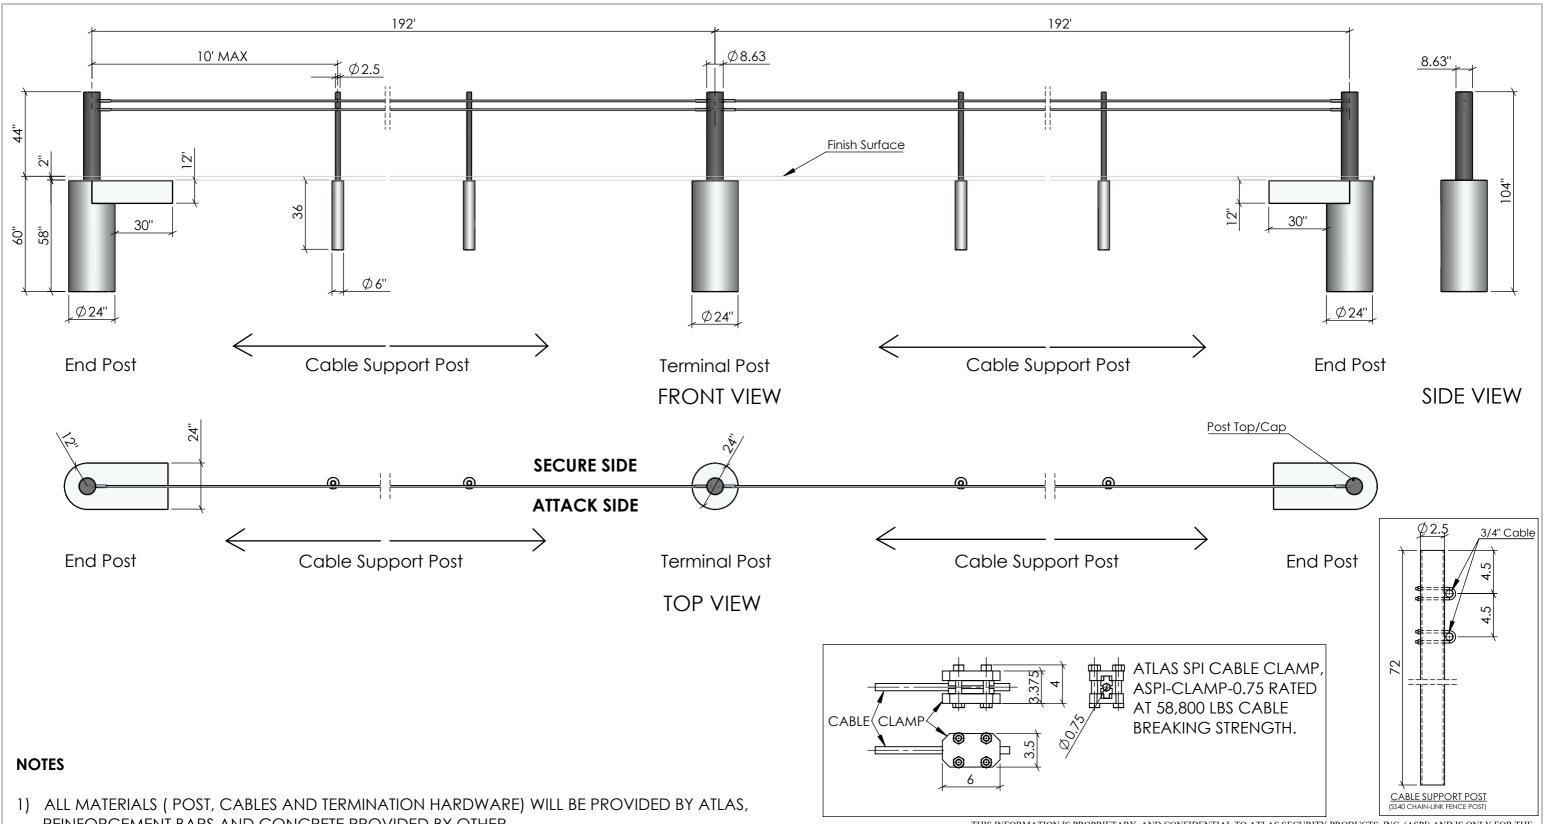

REINFORCEMENT BARS AND CONCRETE PROVIDED BY OTHER.

- 2) THE CONCRETE SHALL BE MINIMUM OF 4000 PSI, POST SHALL BE FILLED WITH 30" OF CONCRETE (STOP 3" FROM BOTTOM CABLE HOLE).
- 3) ALL REBAR SHALL HAVE A MINIMUM OF 2" CONCRETE COVER, SEE REBAR DRAWINGS.
- 4) ATLAS SECURITY PRODUCTS INC'S CABLE CLAMP, ASPI CLAMP-0.75 SHALL BE USE FOR TERMINATION OF CABLE IN THE END AND TERMINAL POSTS. CABLE CLAMP BOLTS SHALL BE TIGHTENED TO 230 FOOT-POUNDS TORQUE.
- 5) U-BOLTS SHALL BE TIGHTENED UNTIL CABLES CAN NOT BE HAND PULLED THRU THE CABLE SUPPORT POST U- BOLTS, MAXIMUM TORQUE SHALL NOT EXCEED 10 FOOT-POUNDS.

THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL TO ATLAS SECURITY PRODUCTS, INC. (ASPI) AND IS ONLY FOR THE REPRODUCED OR UTILIZED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING

ATLAS SECURITY PRODUCTS INC. ATLASBARRIERS.COM PH#: 866-47-ATLAS P.O. BOX 59423, ROCKVILLE, MD 20859 NAME OF CLIENT PROJECT / MACHINE NAME REF DRG NO: DATE DRN 05-01-2021 TITLE: CONSTRUCTION DRAWING SIZE CHKD FOR M30/P2 POST AND A-3 APPD CABLE FENCE UNIT WONO **SCALE** DRG NO: ASPI-CFC-M30P2 REV. NO **INCHES** NTS