


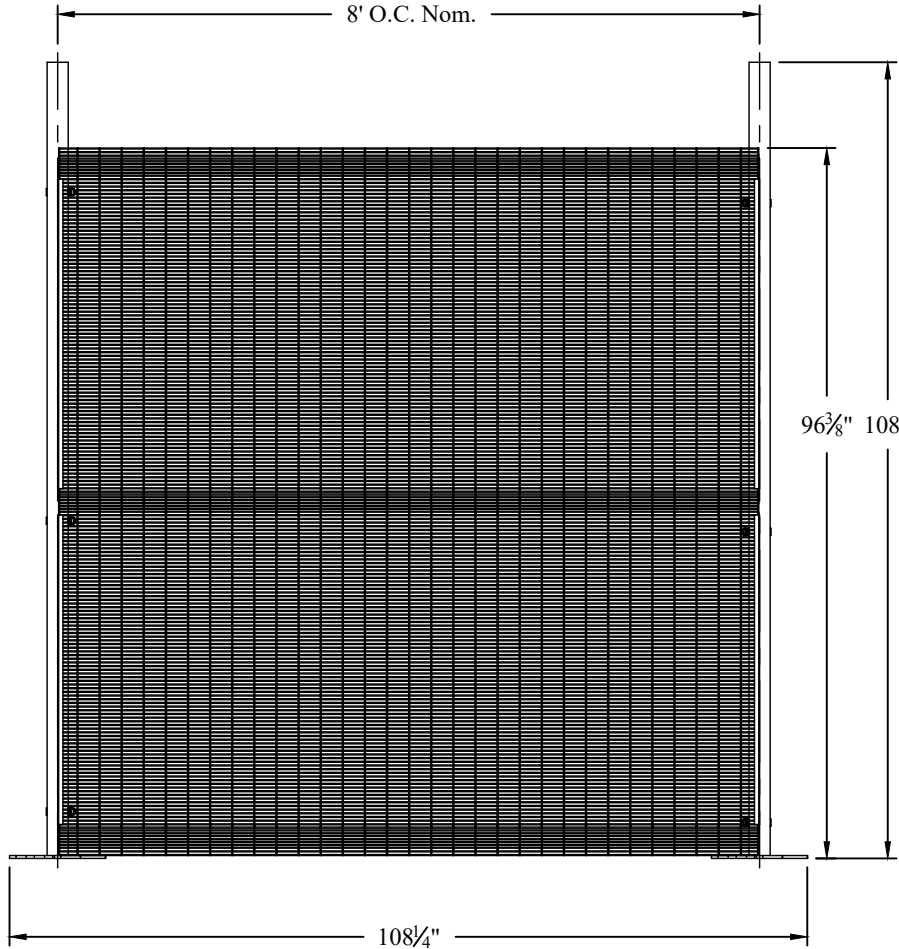
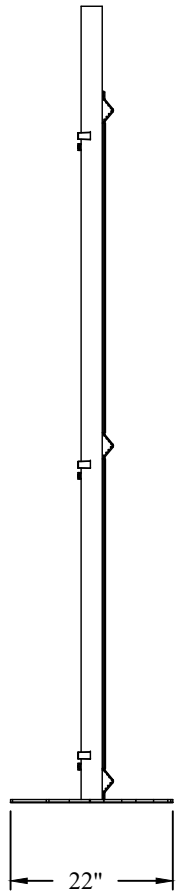


NOTES:


- 1. 2 qty Ground Screws required at each post.
- 2. 2-7/8" OD x PC20 x 9' Post with 22" x 13" x $\frac{3}{8}$ " Baseplate.

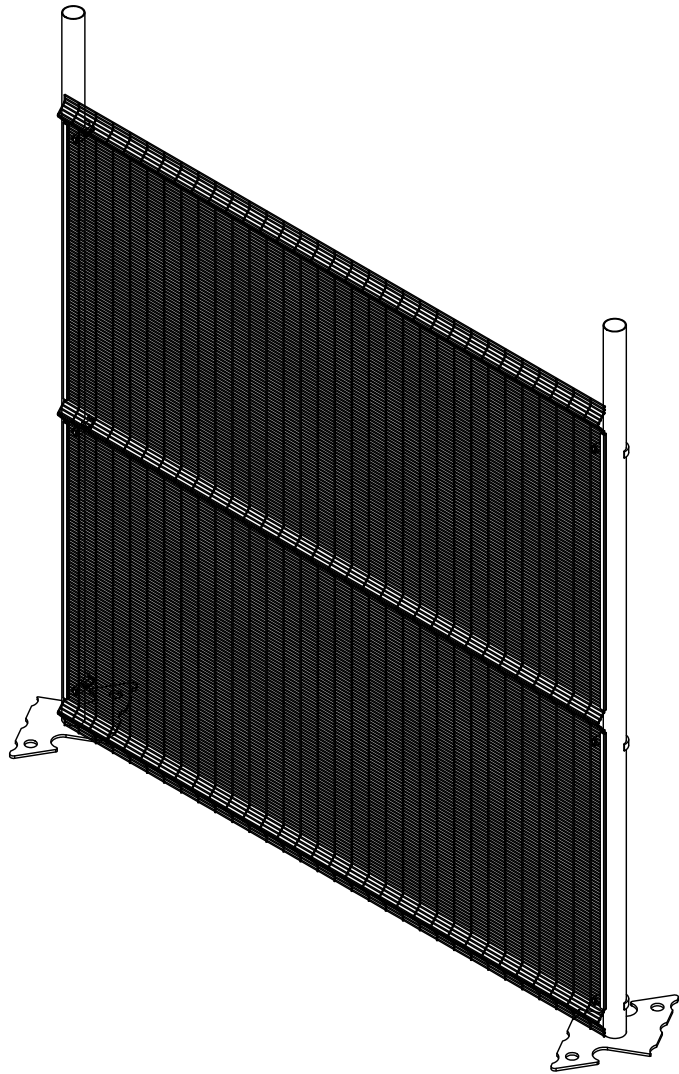


.5" x 3" x 10.5GA WIREWORKS ANTI-CLIMB
MESH W/ 3 V-FOLD RIBS

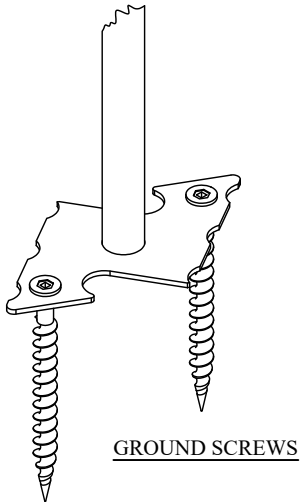

GROUND SCREWS

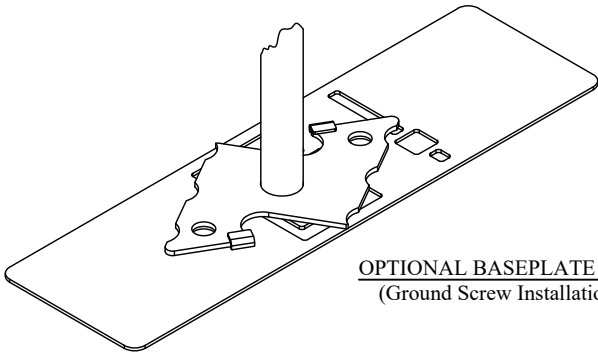

OPTIONAL BASEPLATE EXTENSION
(Ground Screw Installation Optional)

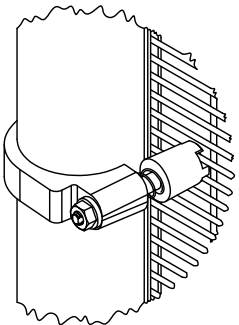

BRACKET DETAIL FROM STRUCTURE SIDE

08/2022

GRIDLOCK® PANEL



AMERISTARFENCE.COM | 800-321-8724

ASSA ABLOY, the global leader in door opening solutions

C:\Users\elyhar\Downloads\Ameristar_Black (1).png